

PIATTAFORMA DATI ESTERNI

APPLICAZIONE PDE

Implementation Guide

INDICE

Implementation Guide	1
1 INTRODUZIONE.....	3
1.1 Scopo del documento	3
1.2 Applicabilità.....	3
1.3 Glossario	3
2 FORMATO DEGLI SCHEMI	4
2.1 TimmBaseMessage.xsd	5
2.2 TimmMessage.xsd.....	6
2.3 BaseMessageTypes.xsd.....	7
2.4 RegistrationTypes.xsd	10
2.5 Ce_Types.xsd.....	22
3 TRANSAZIONI XML SOTTOMESSE DAGLI OPERATORI A PDE	26
3.1 Contratto	26
3.1.1 Contratto.xsd.....	29
3.2 ItemContratto	30
3.2.1 ItemContratto.xsd.....	32
3.3 QuoteCapacita.....	33
3.3.1 QuoteCapacita.xsd	36
4 TRANSAZIONI XML MESSE A DISPOSIZIONE DEGLI OPERATORI	37
4.1 FunctionalAcknowledgement	37
4.1.1 Functional Acknowledgement Positivo.....	37
4.1.2 Functional Acknowledgement Negativo	38
4.1.3 FunctionalAcknowledgement.xsd.....	39
4.2 Notifica di errore (ref xsd: TimmBaseMessage.xsd)	40

1 INTRODUZIONE

1.1 Scopo del documento

L'Applicazione PDE interagisce con diversi attori utilizzando specifiche transazioni.

Questo documento descrive le transazioni supportate dall'applicazione per scambiare informazioni in ingresso ed in uscita con gli operatori.

1.2 Applicabilità

Questo documento contiene il file Excel che descrive le transazioni XML di scambio dati supportate dall'Applicazione PDE.

1.3 Glossario

PDE: Piattaforma dati esterni

2 FORMATO DEGLI SCHEMI

All'interno della presentazione di questa Implementation Guide vengono presentati gli XSD distinti per ogni tipo transazione.

Utilizzando opportunamente l'istruzione "include" è possibile ottenere lo schema *TimmMessage.xsd* (nello schema contenitore *TimmBaseMessage*) che richiama gli xsd specifici di ogni transazione coinvolta nell'applicazione.

Di conseguenza gli esempi indicati nei capitoli successivi mostrano l'xsd della singola transazione e un esempio completo di file XML pronto ad essere inviato alla piattaforma.

2.1 TimmBaseMessage.xsd

```

<?xml version="1.0" encoding="iso-8859-1"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:XML-TIMM" xmlns:pd="urn:XML-TIMM"
  elementFormDefault="qualified">
  <include schemaLocation="BaseMessageTypes.xsd" />
  <element name="Message">
    <complexType>
      <sequence>
        <element ref="pd:tyVersion" minOccurs="0" maxOccurs="1"/>
        <element name="Header" type="pd:tyHeader" minOccurs="1" maxOccurs="1" />
        <choice>
          <element ref="pd:Transaction" minOccurs="1" maxOccurs="unbounded"/>
          <element name="Error" type="pd:tyError" minOccurs="1" maxOccurs="unbounded" />
        </choice>
      </sequence>
      <attribute name="MessageCode" type="pd:tyCeMessageCode" use="optional" />
      <attribute name="MessageType" type="pd:tyMessageType" use="optional" />
      <attribute name="MessageDate" type="date" use="required" />
      <attribute name="MessageTime" type="time" use="optional" />
      <attribute name="MessageSubject" type="pd:tyMessageSubject" use="optional" />
      <!-- Response -->
      <attribute name="ResponseReferenceMessageCode" type="pd:tyMessageCode" use="optional" />
      <attribute name="ResponseMessageStatus" type="pd:tyMessageStatus" use="optional" />
    </complexType>
  </element>
  <element name="TransactionDetail" abstract="true" />
  <element name="Transaction">
    <complexType>
      <choice>
        <element ref="pd:TransactionDetail" minOccurs="1" maxOccurs="1" />
      </choice>
      <attribute name="MPN" type="pd:tyExternalReferenceNumber" use="optional" />
      <!-- Response -->
      <attribute name="ResponseTransactionStatus" type="pd:tyTransactionStatus" use="optional" />
      <attribute name="ResponseProcessingTime" type="dateTime" use="optional" />
      <attribute name="ResponseReferenceTransactionCode" type="pd:tyTransactionCode" use="optional" />
    </complexType>
  </element>
  <element name="tyVersion" abstract="true" type="string" />
</schema>

```

2.2 TimmMessage.xsd

```

<?xml version="1.0" encoding="iso-8859-1"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:XML-TIMM"
  xmlns:pd="urn:XML-TIMM"
  xmlns:Namespace1="http://www.w3.org/2001/XMLSchema"
  elementFormDefault="qualified">
  <include schemaLocation="TimmBaseMessage.xsd" />
  <include schemaLocation="FunctionalAcknowledgement.xsd" />
  <include schemaLocation="Contratto.xsd" />
  <include schemaLocation="ItemContratto.xsd" />
  <include schemaLocation="QuoteCapacita.xsd" />
  <element name="Version" substitutionGroup="pd:tyVersion" type="string" />
  <element name="TimmFA" substitutionGroup="pd:TransactionDetail">
    <complexType>
      <sequence>
        <element name="FunctionalAcknowledgement" type="pd:tyFunctionalAcknowledgement" />
      </sequence>
    </complexType>
  </element>
  <element name="Contratto" substitutionGroup="pd:TransactionDetail">
    <complexType>
      <sequence>
        <element name="ContrattoCommon" type="pd:tyContrattoCommon" />
      </sequence>
    </complexType>
  </element>
  <element name="ItemContratto" substitutionGroup="pd:TransactionDetail">
    <complexType>
      <sequence>
        <element name="ItemContrattoCommon" type="pd:tyItemContrattoCommon" />
      </sequence>
    </complexType>
  </element>
  <element name="QuoteCapacita" substitutionGroup="pd:TransactionDetail">
    <complexType>
      <sequence>
        <element name="QuoteCapacitaCommon" type="pd:tyQuoteCapacitaCommon" />
      </sequence>
    </complexType>
  </element>
</schema>

```

2.3 BaseMessageTypes.xsd

```
<?xml version="1.0" encoding="iso-8859-1" ?>
<schema id="MessageTypes"
xmlns="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:XML-TIMM"
xmlns:pd="urn:XML-TIMM"
elementFormDefault="qualified">
<complexType name="tyError">
<attribute name="Code" type="string" use="required" />
<attribute name="Description" type="string" use="required" />
</complexType>
<complexType name="tyHeader">
<sequence>
<element name="Sender" type="pd:tyAddress"/>
<element name="Receiver" type="pd:tyAddress"/>
</sequence>
</complexType>
<complexType name="tyAddress">
<sequence>
<element name="OperatorMsgCode" type="pd:tyOperatorMsgCode"/>
<element name="CompanyName" type="pd:tyCompanyName" minOccurs="0"/>
<element name="UserMsgCode" type="pd:tyUserMsgCode" minOccurs="0"/>
</sequence>
</complexType>
<simpleType name="tyOperatorMsgCode">
<restriction base="string">
<minLength value="1" />
<maxLength value="16" />
</restriction>
</simpleType>
<simpleType name="tyUserMsgCode">
<restriction base="string">
<minLength value="1" />
<maxLength value="16" />
</restriction>
</simpleType>
<simpleType name="tyMessageCode">
<restriction base="string">
<minLength value="32" />
<maxLength value="32" />
</restriction>
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyCeMessageCode">
  <restriction base="string">
    <minLength value="1" />
  </restriction>
</simpleType>
<simpleType name="tyTransactionCode">
  <restriction base="string">
    <minLength value="32" />
    <maxLength value="32" />
  </restriction>
</simpleType>
<simpleType name="tyFreeTransactionCode">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="32" />
  </restriction>
</simpleType>
<simpleType name="tyTransactionStatus">
  <restriction base="string">
    <enumeration value="Accepted" />
    <enumeration value="Rejected" />
  </restriction>
</simpleType>
<simpleType name="tyMessageType">
  <restriction base="string">
    <enumeration value="Request" />
    <enumeration value="Response" />
    <enumeration value="Notify" />
  </restriction>
</simpleType>
<simpleType name="tyMessageSubject">
  <restriction base="string">
    <enumeration value="TransactionTIMMCmd" />
    <enumeration value="TransactionTIMMFA" />
    <enumeration value="TransactionOperator" />
    <enumeration value="TransactionUser" />
    <enumeration value="TransactionUserRelate" />
  </restriction>
</simpleType>
<simpleType name="tyMessageStatus">
  <restriction base="string">
    <enumeration value="Accepted" />
    <enumeration value="Rejected" />
    <enumeration value="PartiallyAccepted" />
  </restriction>
</simpleType>
<simpleType name="tyCompanyName">
```

PDE: IMPLEMENTATION GUIDE

```
<restriction base="string">  
  <minLength value="1"/>  
  <maxLength value="60"/>  
</restriction>  
  
</simpleType>  
<simpleType name="tyExternalReferenceNumber">  
  <restriction base="string">  
    <minLength value="1"/>  
    <maxLength value="32"/>  
  </restriction>  
</simpleType>  
</schema>
```

2.4 RegistrationTypes.xsd

```
<?xml version="1.0" encoding="iso-8859-1" ?>
<schema id="MessageTypes"
  xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:XML-TIMM"
  xmlns:pd="urn:XML-TIMM"
  elementFormDefault="qualified">

  <simpleType name="tyFrequenza">
    <restriction base="int">
      <minInclusive value="1" />
      <maxInclusive value="36" />
    </restriction>
  </simpleType>

  <simpleType name="tyRagioneSociale">
    <restriction base="string">
      <minLength value="0" />
      <maxLength value="256" />
    </restriction>
  </simpleType>

  <simpleType name="tyPartitalVA">
    <restriction base="string">
      <minLength value="1" />
      <maxLength value="50" />
    </restriction>
  </simpleType>

  <simpleType name="tyCodiceFiscale">
    <restriction base="string">
      <minLength value="0" />
      <maxLength value="50" />
    </restriction>
  </simpleType>

  <simpleType name="tyIndirizzo">
    <restriction base="string">
      <minLength value="1" />
      <maxLength value="256" />
    </restriction>
  </simpleType>

  <simpleType name="tyCAP">
```

PDE: IMPLEMENTATION GUIDE

```
<restriction base="string">
  <minLength value="1" />
  <maxLength value="50" />
</restriction>
</simpleType>

<simpleType name="tyCitta">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="120" />
  </restriction>
</simpleType>

<simpleType name="tyProvincia">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="2" />
  </restriction>
</simpleType>

<simpleType name="tyNazione">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="256" />
  </restriction>
</simpleType>

<simpleType name="tyEmail">
  <restriction base="string">
    <minLength value="0" />
    <maxLength value="60" />
  </restriction>
</simpleType>

<simpleType name="tyTelefono">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="60" />
  </restriction>
</simpleType>

<simpleType name="tyFax">
  <restriction base="string">
    <minLength value="0" />
    <maxLength value="60" />
  </restriction>
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyTitolo">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="50" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCognome">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="60" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyNome">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="60" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyUserName">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="128" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyPassword">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="128" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyIssuer">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tySerialNumber">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyReferenteAmministrativo">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tySedeAmministrativa">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyResponsabileAggiornamento">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="255" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyLingua">  
  <restriction base="string">  
    <minLength value="5" />  
    <maxLength value="5" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCIN">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="1" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyABI">  
  <restriction base="string">  
    <minLength value="5" />  
    <maxLength value="5" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCAB">  
  <restriction base="string">  
    <minLength value="5" />  
    <maxLength value="5" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyCC">  
  <restriction base="string">  
    <minLength value="12" />  
    <maxLength value="12" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyIBAN">  
  <restriction base="string">  
    <minLength value="34" />  
    <maxLength value="34" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyAliquotaIVA">  
  <restriction base="int">  
    <minInclusive value="0" />  
    <maxInclusive value="100" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodiceRuolo">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodiceUtente">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodicePuntoDiScambioRilevante">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyDescrizionePuntoDiScambioRilevante">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyCoefficienteDiPerdita">
  <restriction base="float">
    <minInclusive value="0.0" />
    <maxInclusive value="1.0" />
  </restriction>
</simpleType>

<simpleType name="tyCodiceZona">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="4" />
  </restriction>
</simpleType>

<simpleType name="tyTipoZona">
  <restriction base="string">
    <enumeration value="PPL" />
    <enumeration value="PHYS" />
    <enumeration value="VIRT" />
  </restriction>
</simpleType>

<simpleType name="tyDescrizioneZona">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="256" />
  </restriction>
</simpleType>

<simpleType name="tyCodiceUnita">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="16" />
  </restriction>
</simpleType>

  <simpleType name="tyNomeUnita">
    <restriction base="string">
      <minLength value="1" />
      <maxLength value="100" />
    </restriction>
  </simpleType>
<simpleType name="tyCodiceImpianto">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="20" />
  </restriction>
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyCodiceTipoTecnologia">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="1" />
  </restriction>
</simpleType>

<simpleType name="tyCodiceSottoTipoTecnologia">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="20" />
  </restriction>
</simpleType>

<simpleType name="tyCodiceUdd">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="20" />
  </restriction>
</simpleType>

<simpleType name="tyP_IVA">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="16" />
  </restriction>
</simpleType>

<simpleType name="tyCombustibile">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="8" />
  </restriction>
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyCodiceProprietario">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodiceMotivazione">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyDate">  
  <restriction base="integer">  
    <minInclusive value="19000101"/>  
    <maxInclusive value="29001231"/>  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyHourIntervalType">  
  <restriction base="integer">  
    <minInclusive value="1"/>  
    <maxInclusive value="25"/>  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyTipoUnita">  
  <restriction base="string">  
    <enumeration value="C" />  
    <enumeration value="M" />  
    <enumeration value="P" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tySottoTipoUnita">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="100" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyDescrizioneUnita">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodiceContratto">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="32" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodiceInvio">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCedenteAcquirente">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="150" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyStrutturaContratto">  
  <restriction base="string">  
    <enumeration value="future"/>  
    <enumeration value="swap"/>  
    <enumeration value="opzione"/>  
    <enumeration value="altro" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyPrezzoRiferimento">  
  <restriction base="string">  
    <enumeration value="Pun"/>  
    <enumeration value="Pnord"/>  
    <enumeration value="Pmftv"/>  
    <enumeration value="Pcnor"/>  
    <enumeration value="Pcsud" />  
    <enumeration value="Psud"/>  
    <enumeration value="Pfogn"/>  
    <enumeration value="Pbrnn"/>  
    <enumeration value="Prosn"/>  
    <enumeration value="Psici" />  
    <enumeration value="Pprgp"/>  
    <enumeration value="Psard"/>  
    <enumeration value="Pfran"/>  
    <enumeration value="Psviz"/>  
    <enumeration value="Paust" />  
    <enumeration value="Pslov"/>  
    <enumeration value="Pcoac"/>  
    <enumeration value="Pcors"/>  
    <enumeration value="Pgreg"/>  
    <enumeration value="Altro" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyTipologiaContratto">  
  <restriction base="string">  
    <enumeration value="STD"/>  
    <enumeration value="OTCO"/>  
    <enumeration value="OTC"/>  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyDescrizioneContratto">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyIndicizzazioneContratto">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyMercatoOrganizzato">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyCodiceoperatore">  
  <restriction base="string">  
    <minLength value="1" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyOrdineDiMerito">  
  <restriction base="integer">  
    <minInclusive value="0" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyUnbalancedParticipantNumber">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="60" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyInjectionOrWithdrawalPointNumber">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="16" />  
  </restriction>  
</simpleType>
```

```
<simpleType name="tyMustRun">  
  <restriction base="string">  
    <minLength value="0" />  
    <maxLength value="256" />  
  </restriction>  
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyTipoOperatore">
  <restriction base="string">
    <enumeration value="STD"/>
    <enumeration value="OWN"/>
    <enumeration value="SPC"/>
    <enumeration value="TSO"/>
    <enumeration value="ANG"/>
  </restriction>
</simpleType>

<simpleType name="tySegno">
  <restriction base="string">
    <enumeration value="+"/>
    <enumeration value="-"/>
  </restriction>
</simpleType>
</schema>
```

2.5 Ce_Types.xsd

```

<?xml version="1.0" encoding="iso-8859-1" ?>
<schema id="MessageTypes"
xmlns="http://www.w3.org/2001/XMLSchema"
targetNamespace="urn:XML-TIMM"
xmlns:pd="urn:XML-TIMM"
elementFormDefault="qualified">

  <element name="RejectInformation">
    <complexType>
      <sequence>
        <element name="Reason" type="pd:tyReasonType"/>
        <element name="ReasonText" type="pd:tyReasonTextType" minOccurs="0" maxOccurs="1"/>
      </sequence>
    </complexType>
  </element>

  <simpleType name="tyCodiceOperatore">
    <restriction base="string">
      <minLength value="1" />
      <maxLength value="16" />
    </restriction>
  </simpleType>

  <simpleType name="tyAlpha">
    <restriction base="string">
      <pattern value="^[0]|^[0](\d{1,2})|^[1](,[0]{1,2})|^[1]$" />
    </restriction>
  </simpleType>

  <simpleType name="tyRendimentoMedio">
    <restriction base="string">
      <pattern value="^\d{1,4}(\d{1,4})|^\d{1,4}(\d{1,3})|^\d{1,4}(\d{1,2})|^\d{1,4}(\d{1,1})|^\d{1,4}$" />
    </restriction>
  </simpleType>

  <simpleType name="tyQtyCO2">
    <restriction base="string">
      <pattern value="^\d{1,12}(\d{1,4})|^\d{1,12}(\d{1,3})|^\d{1,12}(\d{1,2})|^\d{1,12}(\d{1,1})|^\d{1,12}$" />
    </restriction>
  </simpleType>

```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyQtyCombustibile">
  <restriction base="string">
    <pattern value="^[d{1,12},\d{1,4})|^?[d{1,12},\d{1,3})|^?[d{1,12},\d{1,2})|^?[d{1,12},\d{1,1})|^?[d{1,12})$"/>
  </restriction>
</simpleType>

<simpleType name="tyPotenzaMW">
  <restriction base="string">
    <pattern value="^[d{1,12},\d{1,4})|^?[d{1,12},\d{1,3})|^?[d{1,12},\d{1,2})|^?[d{1,12},\d{1,1})|^?[d{1,12})$"/>
  </restriction>
</simpleType>

<simpleType name="tyQtyMWh">
  <restriction base="string">
    <pattern value="^[d{1,12},\d{1,3})|^?[d{1,12},\d{1,2})|^?[d{1,12},\d{1,1})|^?[d{1,12})$"/>
  </restriction>
</simpleType>

<simpleType name="tyPrice">
  <restriction base="string">
    <pattern value="^[d{1,12},\d{1,2})|^?[d{1,12},\d{1,1})|^?[d{1,12})$"/>
  </restriction>
</simpleType>

<simpleType name="tyQtyMWhxxx">
  <restriction base="string">
    <pattern value="^[+]?[d{1,3})(\d{3})|^[-]?[d{1,9})|^[-]?[d{1,3})(\d{3})(\d{3})|^[-]?[d{1,9})(\d{1,3})$"/>
  </restriction>
</simpleType>

<simpleType name="tyQtyMWhPos">
  <restriction base="string">
    <pattern value="^[d{1,3})(\d{3})|^?[d{1,3})(\d{3})(\d{1,3})|^?[d{1,9})|^?[d{1,9})(\d{1,3})$"/>
  </restriction>
</simpleType>

<simpleType name="tyQtyMWhNeg">
  <restriction base="string">
    <pattern value="^-?[d{1,3})(\d{3})|^-[d{1,3})(\d{3})(\d{1,3})|^-[d{1,9})|^-[d{1,9})(\d{1,3})$"/>
  </restriction>
</simpleType>

<simpleType name="tyPriceMWh">
  <restriction base="string">
    <pattern value="^[d{1,3})(\d{3})|^?[d{1,3})(\d{3})(\d{1,2})|^?[d{1,9})|^?[d{1,9})(\d{1,2})$"/>
  </restriction>
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
</simpleType>
<simpleType name="tyPGMPriceMWh">
  <restriction base="string">
    <pattern value="^\d{1,3}((\d{3})*)\d{1,3}((\d{3})*)(\d{1,6})|^?\d{1,9}|^?\d{1,9}(\d{1,6})$" />
  </restriction>
</simpleType>

<simpleType name="tyControValore">
  <restriction base="string">
    <pattern value="^[+]?(\d{1,3}((\d{3})*)|^[+]?(\d{1,3}((\d{3})*)(\d{1,2})|^[-+]?(\d{1,9})|^[-+]?(\d{1,9})(\d{1,2}))$" />
  </restriction>
</simpleType>

<simpleType name="tyPUN">
  <restriction base="string">
    <pattern value="^\d{1,3}((\d{3})*)\d{1,3}((\d{3})*)(\d{1,6})|^?\d{1,9}|^?\d{1,9}(\d{1,6})$" />
  </restriction>
</simpleType>

<simpleType name="tyUnitOfMeasure">
  <restriction base="string">
    <enumeration value="MWh" />
  </restriction>
</simpleType>

<simpleType name="tyTransactionType">
  <restriction base="string">
    <enumeration value="TransactionTimmFA" />
    <enumeration value="tyError" />
    <enumeration value="TransactionContratto" />
    <enumeration value="TransactionItemContratto" />
    <enumeration value="TransactionQuoteCapacita" />
  </restriction>
</simpleType>

<simpleType name="tyReasonType">
  <restriction base="string">
    <minLength value="0" />
    <maxLength value="32" />
  </restriction>
</simpleType>
```

PDE: IMPLEMENTATION GUIDE

```
<simpleType name="tyReasonTextType">
  <restriction base="string">
    <minLength value="0" />
    <maxLength value="1024" />
  </restriction>
</simpleType>
<simpleType name="yesNoType">
  <restriction base="string">
    <enumeration value="Yes"/>
    <enumeration value="No"/>
  </restriction>
</simpleType>

<simpleType name="tyMPN">
  <restriction base="string">
    <minLength value="1" />
    <maxLength value="32" />
  </restriction>
</simpleType>

<simpleType name="marketType">
  <restriction base="string">
    <enumeration value="MGP"/>
    <enumeration value="MA1"/>
    <enumeration value="MB"/>
    <enumeration value="MSD"/>
  </restriction>
</simpleType>

<simpleType name="tyTipoOperazione">
  <restriction base="string">
    <enumeration value="AddNew"/>
    <enumeration value="Modify"/>
  </restriction>
</simpleType>

  <simpleType name="tyTipoOperazione2">
    <restriction base="string">
      <enumeration value="AddNew"/>
      <enumeration value="DeleteInsert"/>
    </restriction>
  </simpleType>
</schema>
```

3 TRANSAZIONI XML SOTTOMESSE DAGLI OPERATORI A PDE

3.1 Contratto

```
<?xml version='1.0' encoding='ISO-8859-1'?>
<Message
  xmlns:xsd='http://www.w3.org/2001/XMLSchema'
  xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
  MessageDate='2009-03-11'
  xmlns='urn:XML-TIMM'
  MessageType='Request' >
  <Header>
    <Sender>
      <OperatorMsgCode>OEXXXX</OperatorMsgCode>
    </Sender>
    <Receiver>
      <OperatorMsgCode>IDGME</OperatorMsgCode>
    </Receiver>
  </Header>
  <Transaction>
    <Contratto>
      <ContrattoCommon>
        <CodiceContratto>XX-XX-XXXXZ</CodiceContratto>
        <DataStipula>20090201</DataStipula>
        <Cedente>OEXXXX</Cedente>
        <RagioneSocialeCedente>Operatore elettrico1 SPA</RagioneSocialeCedente>
        <Acquirente>OEYYYY</Acquirente>
        <RagioneSocialeAcquirente>Operatore elettrico2 SPA</RagioneSocialeAcquirente>
        <ControparteElettrica>true</ControparteElettrica>
        <Tipologia>OTC</Tipologia>
        <MercatoOrganizzato>MKT1</MercatoOrganizzato>
        <Struttura>altro</Struttura>
        <Descrizione>campo descrizione</Descrizione>
        <Indicizzato>>false</Indicizzato>
        <Indicizzazione>campo descrizione indicizzazione</Indicizzazione>
        <Flessibile>true</Flessibile>
      </ContrattoCommon>
    </Contratto>
  </Transaction>
</Message>
```

PDE: IMPLEMENTATION GUIDE

```
<DescrizioneFlessibile>campo descrizione indicizzazione</DescrizioneFlessibile>  
<PrezzoRiferimento>Pun</PrezzoRiferimento>  
<Frequenza>3</Frequenza>
```

```
<ProfiloGiornaliero Data='20090401'>  
  <ProfiloOrario Ora='1' Prezzo='12'>33,75</ProfiloOrario>  
  <ProfiloOrario Ora='2' Prezzo='14'>33,76</ProfiloOrario>  
  <ProfiloOrario Ora='3' Prezzo='16'>33,77</ProfiloOrario>  
  <ProfiloOrario Ora='4' Prezzo='18'>33,78</ProfiloOrario>  
  <ProfiloOrario Ora='5' Prezzo='20'>33,79</ProfiloOrario>  
  <ProfiloOrario Ora='6' Prezzo='22'>33,8</ProfiloOrario>  
  <ProfiloOrario Ora='7' Prezzo='24'>33,81</ProfiloOrario>  
  <ProfiloOrario Ora='8' Prezzo='26'>33,82</ProfiloOrario>  
  <ProfiloOrario Ora='9' Prezzo='28'>33,83</ProfiloOrario>  
  <ProfiloOrario Ora='10' Prezzo='30'>33,84</ProfiloOrario>  
  <ProfiloOrario Ora='11' Prezzo='32'>33,85</ProfiloOrario>  
  <ProfiloOrario Ora='12' Prezzo='34'>33,86</ProfiloOrario>  
  <ProfiloOrario Ora='13' Prezzo='36'>33,87</ProfiloOrario>  
  <ProfiloOrario Ora='14' Prezzo='38'>33,88</ProfiloOrario>  
  <ProfiloOrario Ora='15' Prezzo='40'>33,89</ProfiloOrario>  
  <ProfiloOrario Ora='16' Prezzo='42'>33,9</ProfiloOrario>  
  <ProfiloOrario Ora='17' Prezzo='44'>33,91</ProfiloOrario>  
  <ProfiloOrario Ora='18' Prezzo='46'>33,92</ProfiloOrario>  
  <ProfiloOrario Ora='19' Prezzo='48'>33,93</ProfiloOrario>  
  <ProfiloOrario Ora='20' Prezzo='50'>33,94</ProfiloOrario>  
  <ProfiloOrario Ora='21' Prezzo='52'>33,95</ProfiloOrario>  
  <ProfiloOrario Ora='22' Prezzo='54'>33,96</ProfiloOrario>  
  <ProfiloOrario Ora='23' Prezzo='56'>33,97</ProfiloOrario>  
  <ProfiloOrario Ora='24' Prezzo='58'>33,98</ProfiloOrario>
```

```
</ProfiloGiornaliero>
```

```
<ProfiloGiornaliero Data='20090402'>  
  <ProfiloOrario Ora='1' Prezzo='12'>57</ProfiloOrario>  
  <ProfiloOrario Ora='2' Prezzo='14'>33,76</ProfiloOrario>  
  <ProfiloOrario Ora='3' Prezzo='16'>33,77</ProfiloOrario>  
  <ProfiloOrario Ora='4' Prezzo='18'>33,78</ProfiloOrario>  
  <ProfiloOrario Ora='5' Prezzo='20'>33,79</ProfiloOrario>  
  <ProfiloOrario Ora='6' Prezzo='22'>33,8</ProfiloOrario>  
  <ProfiloOrario Ora='7' Prezzo='24'>33,81</ProfiloOrario>  
  <ProfiloOrario Ora='8' Prezzo='26'>33,82</ProfiloOrario>  
  <ProfiloOrario Ora='9' Prezzo='28'>33,83</ProfiloOrario>  
  <ProfiloOrario Ora='10' Prezzo='30'>33,84</ProfiloOrario>  
  <ProfiloOrario Ora='11' Prezzo='32'>33,85</ProfiloOrario>
```

PDE: IMPLEMENTATION GUIDE

```
<ProfiloOrario Ora='12' Prezzo='34'>33,86</ProfiloOrario>
<ProfiloOrario Ora='13' Prezzo='36'>33,87</ProfiloOrario>
<ProfiloOrario Ora='14' Prezzo='38'>33,88</ProfiloOrario>
<ProfiloOrario Ora='15' Prezzo='40'>33,89</ProfiloOrario>
<ProfiloOrario Ora='16' Prezzo='42'>33,9</ProfiloOrario>
<ProfiloOrario Ora='17' Prezzo='44'>33,91</ProfiloOrario>
<ProfiloOrario Ora='18' Prezzo='46'>33,92</ProfiloOrario>
<ProfiloOrario Ora='19' Prezzo='48'>33,93</ProfiloOrario>
<ProfiloOrario Ora='20' Prezzo='50'>33,94</ProfiloOrario>
<ProfiloOrario Ora='21' Prezzo='52'>33,95</ProfiloOrario>
<ProfiloOrario Ora='22' Prezzo='54'>33,96</ProfiloOrario>
<ProfiloOrario Ora='23' Prezzo='56'>33,97</ProfiloOrario>
<ProfiloOrario Ora='24' Prezzo='58'>33,98</ProfiloOrario>
</ProfiloGiornaliero>
</ContrattoCommon>
</Contratto>
</Transaction>
</Message>
```

3.1.1 Contratto.xsd

```

<?xml version="1.0" encoding="ISO-8859-1"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema" targetNamespace="urn:XML-TIMM" xmlns:pd="urn:XML-TIMM" elementFormDefault="qualified">
  <include schemaLocation="RegistrationTypes.xsd" />
  <include schemaLocation="Types.xsd" />
  <complexType name="tyContrattoCommon">
    <sequence>
      <element name="CodiceContratto" type="pd:tyCodiceContratto" minOccurs="1" maxOccurs="1" />
      <element name="DataStipula" type="pd:tyDate" minOccurs="0" maxOccurs="1" />
      <element name="Cedente" type="pd:tyCedenteAcquirente" minOccurs="1" maxOccurs="1" />
      <element name="RagioneSocialeCedente" type="pd:tyRagioneSociale" minOccurs="0" maxOccurs="1" />
      <element name="Acquirente" type="pd:tyCedenteAcquirente" minOccurs="1" maxOccurs="1" />
      <element name="RagioneSocialeAcquirente" type="pd:tyRagioneSociale" minOccurs="0" maxOccurs="1" />
      <element name="ControparteElettrica" type="boolean" minOccurs="1" maxOccurs="1" />
      <element name="Tipologia" type="pd:tyTipologiaContratto" minOccurs="1" maxOccurs="1" />
      <element name="MercatoOrganizzato" type="pd:tyMercatoOrganizzato" minOccurs="0" maxOccurs="1" />
      <element name="Struttura" type="pd:tyStrutturaContratto" minOccurs="1" maxOccurs="1" />
      <element name="Descrizione" type="pd:tyDescrizioneContratto" minOccurs="0" maxOccurs="1" />
      <element name="Indicizzato" type="boolean" minOccurs="1" maxOccurs="1" />
      <element name="Indicizzazione" type="pd:tyIndicizzazioneContratto" minOccurs="0" maxOccurs="1" />
      <element name="Flessibile" type="boolean" minOccurs="1" maxOccurs="1" />
      <element name="DescrizioneFlessibile" type="pd:tyIndicizzazioneContratto" minOccurs="0" maxOccurs="1" />
      <element name="Premio" type="pd:tyPrice" minOccurs="0" maxOccurs="1" />
      <element name="ProfiloGiornaliero" type="pd:ProfiloGiornaliero" minOccurs="1" maxOccurs="unbounded" />
      <element name="PrezzoRiferimento" type="pd:tyPrezzoRiferimento" minOccurs="1" maxOccurs="1" />
      <element name="DescrizionePrezzoRiferimento" type="pd:tyDescrizioneContratto" minOccurs="0" maxOccurs="1" />
      <element name="Frequenza" type="pd:tyFrequenza" minOccurs="0" maxOccurs="1" />
    </sequence>
  </complexType>
  <complexType name="ProfiloGiornaliero">
    <sequence>
      <element name="ProfiloOrario" type="pd:ProfiloOrario" minOccurs="1" maxOccurs="25" />
    </sequence>
    <attribute name="Data" type="pd:tyDate" use="required" />
  </complexType>
  <complexType name="ProfiloOrario">
    <simpleContent>
      <extension base="pd:tyQtyMWh">
        <attribute name="Ora" type="pd:tyHourIntervalType" use="required" />
        <attribute name="Prezzo" type="pd:tyPrice" use="optional" />
      </extension>
    </simpleContent>
  </complexType>
</schema>

```

3.2 ItemContratto

```
<?xml version='1.0' encoding='ISO-8859-1'?>
<Message
  xmlns:xsd='http://www.w3.org/2001/XMLSchema'
  xmlns:xsi='http://www.w3.org/2001/XMLSchema-instance'
  MessageDate='2009-03-26'
  xmlns='urn:XML-TIMM'
  MessageType='Request'>
  <Header>
    <Sender>
      <OperatorMsgCode>OEXXXX</OperatorMsgCode>
    </Sender>
    <Receiver>
      <OperatorMsgCode>IDGME</OperatorMsgCode>
    </Receiver>
  </Header>
  <Transaction>
    <ItemContratto>
      <ItemContrattoCommon>
        <CodiceContratto>XX-XX-XXXX</CodiceContratto>
        <ProfiloGiornaliero Data='20070430'>
          <ProfiloOrario Ora='1' Prezzo='12'>33,75</ProfiloOrario>
          <ProfiloOrario Ora='2' Prezzo='14'>33,76</ProfiloOrario>
          <ProfiloOrario Ora='3' Prezzo='16'>33,77</ProfiloOrario>
          <ProfiloOrario Ora='4' Prezzo='18'>33,78</ProfiloOrario>
          <ProfiloOrario Ora='5' Prezzo='20'>33,79</ProfiloOrario>
          <ProfiloOrario Ora='6' Prezzo='22'>33,8</ProfiloOrario>
          <ProfiloOrario Ora='7' Prezzo='24'>33,81</ProfiloOrario>
          <ProfiloOrario Ora='8' Prezzo='26'>33,82</ProfiloOrario>
          <ProfiloOrario Ora='9' Prezzo='28'>33,83</ProfiloOrario>
          <ProfiloOrario Ora='10' Prezzo='30'>33,84</ProfiloOrario>
          <ProfiloOrario Ora='11' Prezzo='32'>33,85</ProfiloOrario>
          <ProfiloOrario Ora='12' Prezzo='34'>33,86</ProfiloOrario>
          <ProfiloOrario Ora='13' Prezzo='36'>33,87</ProfiloOrario>
          <ProfiloOrario Ora='14' Prezzo='38'>33,88</ProfiloOrario>
          <ProfiloOrario Ora='15' Prezzo='40'>33,89</ProfiloOrario>
          <ProfiloOrario Ora='16' Prezzo='42'>33,9</ProfiloOrario>
          <ProfiloOrario Ora='17' Prezzo='44'>33,91</ProfiloOrario>
          <ProfiloOrario Ora='18' Prezzo='46'>33,92</ProfiloOrario>
        </ProfiloGiornaliero>
      </ItemContrattoCommon>
    </ItemContratto>
  </Transaction>
</Message>
```

PDE: IMPLEMENTATION GUIDE

```
<ProfiloOrario Ora='19' Prezzo='48'>33,93</ProfiloOrario>
<ProfiloOrario Ora='20' Prezzo='50'>33,94</ProfiloOrario>
<ProfiloOrario Ora='21' Prezzo='52'>33,95</ProfiloOrario>
<ProfiloOrario Ora='22' Prezzo='54'>33,96</ProfiloOrario>
<ProfiloOrario Ora='23' Prezzo='56'>33,97</ProfiloOrario>
<ProfiloOrario Ora='24' Prezzo='58'>33,98</ProfiloOrario>
</ProfiloGiornaliero>
<ProfiloGiornaliero Data='20070501'>
  <ProfiloOrario Ora='1' Prezzo='12'>57</ProfiloOrario>
  <ProfiloOrario Ora='2' Prezzo='14'>33,76</ProfiloOrario>
  <ProfiloOrario Ora='3' Prezzo='16'>33,77</ProfiloOrario>
  <ProfiloOrario Ora='4' Prezzo='18'>33,78</ProfiloOrario>
  <ProfiloOrario Ora='5' Prezzo='20'>33,79</ProfiloOrario>
  <ProfiloOrario Ora='6' Prezzo='22'>33,8</ProfiloOrario>
  <ProfiloOrario Ora='7' Prezzo='24'>33,81</ProfiloOrario>
  <ProfiloOrario Ora='8' Prezzo='26'>33,82</ProfiloOrario>
  <ProfiloOrario Ora='9' Prezzo='28'>33,83</ProfiloOrario>
  <ProfiloOrario Ora='10' Prezzo='30'>33,84</ProfiloOrario>
  <ProfiloOrario Ora='11' Prezzo='32'>33,85</ProfiloOrario>
  <ProfiloOrario Ora='12' Prezzo='34'>33,86</ProfiloOrario>
  <ProfiloOrario Ora='13' Prezzo='36'>33,87</ProfiloOrario>
  <ProfiloOrario Ora='14' Prezzo='38'>33,88</ProfiloOrario>
  <ProfiloOrario Ora='15' Prezzo='40'>33,89</ProfiloOrario>
  <ProfiloOrario Ora='16' Prezzo='42'>33,9</ProfiloOrario>
  <ProfiloOrario Ora='17' Prezzo='44'>33,91</ProfiloOrario>
  <ProfiloOrario Ora='18' Prezzo='46'>33,92</ProfiloOrario>
  <ProfiloOrario Ora='19' Prezzo='48'>33,93</ProfiloOrario>
  <ProfiloOrario Ora='20' Prezzo='50'>33,94</ProfiloOrario>
  <ProfiloOrario Ora='21' Prezzo='52'>33,95</ProfiloOrario>
  <ProfiloOrario Ora='22' Prezzo='54'>33,96</ProfiloOrario>
  <ProfiloOrario Ora='23' Prezzo='56'>33,97</ProfiloOrario>
  <ProfiloOrario Ora='24' Prezzo='58'>33,98</ProfiloOrario>
</ProfiloGiornaliero>
</ItemContrattoCommon>
</ItemContratto>
</Transaction>
</Message>
```

3.2.1 ItemContratto.xsd

```
<?xml version="1.0" encoding="iso-8859-1"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema" targetNamespace="urn:XML-TIMM" xmlns:pd="urn:XML-TIMM" elementFormDefault="qualified">
  <include schemaLocation="RegistrationTypes.xsd" />
  <include schemaLocation="Types.xsd" />
  <complexType name="tyItemContrattoCommon">
    <sequence>
      <element name="CodiceContratto" type="pd:tyCodiceContratto" minOccurs="1" maxOccurs="1" />
    </sequence>
  </complexType>
  <complexType name="ProfiloGiornalieroItem">
    <sequence>
      <element name="ProfiloGiornaliero" type="pd:ProfiloGiornalieroItem" minOccurs="1" maxOccurs="unbounded" />
    </sequence>
  </complexType>
  <complexType name="ProfiloOrarioItem">
    <sequence>
      <element name="ProfiloOrario" type="pd:ProfiloOrarioItem" minOccurs="1" maxOccurs="25" />
    </sequence>
  </complexType>
  <complexType name="ProfiloOrarioItem">
    <simpleContent>
      <extension base="pd:tyQtyMWh">
        <attribute name="Ora" type="pd:tyHourIntervalType" use="required" />
        <attribute name="Prezzo" type="pd:tyPrice" use="optional" />
      </extension>
    </simpleContent>
  </complexType>
</schema>
```

3.3 QuoteCapacita

```

<?xml version="1.0" encoding="iso-8859-1"?>
<Message xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema" MessageType="Request" MessageDate="2012-03-09"
MessageTime="13:37:29.3846727+01:00" xmlns="urn:XML-TIMM">
  <Header>
    <Sender>
      <OperatorMsgCode>OEXXXXP</OperatorMsgCode>
    </Sender>
    <Receiver>
      <OperatorMsgCode>IDGME</OperatorMsgCode>
    </Receiver>
  </Header>
  <Transaction>
    <QuoteCapacita>
      <QuoteCapacitaCommon>
        <CodiceUnita>UP_DI0342_CNOR_G</CodiceUnita>
        <QuoteCapacitaGiornaliera Data="20120401">
          <QuoteCapacitaOraria Ora="1">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,8</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,2</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
          <QuoteCapacitaOraria Ora="2">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,4</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,6</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
          <QuoteCapacitaOraria Ora="3">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,3</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,7</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
          <QuoteCapacitaOraria Ora="4">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,9</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,1</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
          <QuoteCapacitaOraria Ora="5">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,3</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,7</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
          <QuoteCapacitaOraria Ora="6">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,3</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,7</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
          <QuoteCapacitaOraria Ora="7">
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,9</QuoteCapacitaDelegato>
            <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXG">0,1</QuoteCapacitaDelegato>
          </QuoteCapacitaOraria>
        </QuoteCapacitaGiornaliera>
      </QuoteCapacitaCommon>
    </QuoteCapacita>
  </Transaction>
</Message>

```


PDE: IMPLEMENTATION GUIDE

```
<QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,4</QuoteCapacitaDelegato>
<QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXYG">0,6</QuoteCapacitaDelegato>
</QuoteCapacitaOraria>
<QuoteCapacitaOraria Ora="21">
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,6</QuoteCapacitaDelegato>
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXYG">0,4</QuoteCapacitaDelegato>
</QuoteCapacitaOraria>
<QuoteCapacitaOraria Ora="22">
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,5</QuoteCapacitaDelegato>
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXYG">0,5</QuoteCapacitaDelegato>
</QuoteCapacitaOraria>
<QuoteCapacitaOraria Ora="23">
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,5</QuoteCapacitaDelegato>
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXYG">0,5</QuoteCapacitaDelegato>
</QuoteCapacitaOraria>
<QuoteCapacitaOraria Ora="24">
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXXP">0,2</QuoteCapacitaDelegato>
  <QuoteCapacitaDelegato CodiceOperatoreDelegato="OEXXXYG">0,8</QuoteCapacitaDelegato>
</QuoteCapacitaOraria>
</QuoteCapacitaGiornaliera>
</QuoteCapacitaCommon>
</QuoteCapacita>
</Transaction>
</Message>
```

3.3.1 QuoteCapacita.xsd

```

<?xml version="1.0" encoding="iso-8859-1"?>
<schema xmlns="http://www.w3.org/2001/XMLSchema" targetNamespace="urn:XML-TIMM" xmlns:pd="urn:XML-TIMM" elementFormDefault="qualified">
  <include schemaLocation="RegistrationTypes.xsd" />
  <include schemaLocation="Types.xsd" />
  <complexType name="tyQuoteCapacitaCommon">
    <sequence>
      <element name="CodiceUnita" type="pd:tyCodiceUnita" minOccurs="1" maxOccurs="1" />
      <element name="CodiceOperatore" type="pd:tyCodiceoperatore" minOccurs="1" maxOccurs="1" />
      <element name="QuoteCapacitaGiornaliera" type="pd:QuoteCapacitaGiornaliera" minOccurs="1" maxOccurs="unbounded" />
    </sequence>
  </complexType>
  <complexType name="QuoteCapacitaGiornaliera">
    <sequence>
      <element name="QuoteCapacitaOraria" type="pd:QuoteCapacitaOraria" minOccurs="1" maxOccurs="25" />
    </sequence>
    <attribute name="Data" type="pd:tyDate" use="required" />
  </complexType>
  <complexType name="QuoteCapacitaOraria">
    <sequence>
      <element name="QuoteCapacitaDelegato" type="pd:QuoteCapacitaDelegato" minOccurs="1" maxOccurs="unbounded" />
    </sequence>
    <attribute name="Ora" type="pd:tyHourIntervalType" use="required" />
  </complexType>
  <complexType name="QuoteCapacitaDelegato">
    <simpleContent>
      <extension base="pd:tyAlpha">
        <attribute name="CodiceOperatoreDelegato" type="pd:tyCodiceOperatore" use="required" />
      </extension>
    </simpleContent>
  </complexType>
</schema>

```

4 TRANSAZIONI XML MESSE A DISPOSIZIONE DEGLI OPERATORI

4.1 FunctionalAcknowledgement

4.1.1 Functional Acknowledgement Positivo

```
<?xml version="1.0" encoding="iso-8859-1"?>
<Message xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
MessageTypes="Response" MessageDate="2009-03-25" MessageTime="10:48:49.8281250+01:00"
ResponseReferenceMessageCode="814" ResponseMessageStatus="Accepted" xmlns="urn:XML-TIMM">
  <Header>
    <Sender>
      <OperatorMsgCode>IDGME</OperatorMsgCode>
    </Sender>
    <Receiver>
      <OperatorMsgCode>OEXXXXX</OperatorMsgCode>
    </Receiver>
  </Header>
  <Transaction>
    <TimmFA>
      <FunctionalAcknowledgement TransactionType="TransactionQuoteCapacita" Status="Accepted" XmlOrder="1" />
    </TimmFA>
  </Transaction>
  <Transaction>
    <TimmFA>
      <FunctionalAcknowledgement TransactionType="TransactionQuoteCapacita" Status="Accepted" XmlOrder="2" />
    </TimmFA>
  </Transaction>
</Message>
```

4.1.2 Functional Acknowledgement Negative

```

<?xml version="1.0" encoding="iso-8859-1"?>
<Message xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
MessageTypes="Response" MessageDate="2009-03-25" MessageTime="10:47:18.7500000+01:00"
ResponseReferenceMessageCode="812" ResponseMessageStatus="Rejected" xmlns="urn:XML-TIMM">
  <Header>
    <Sender>
      <OperatorMsgCode>IDGME</OperatorMsgCode>
    </Sender>
    <Receiver>
      <OperatorMsgCode>OEAESRL</OperatorMsgCode>
    </Receiver>
  </Header>
  <Transaction>
    <TimmFA>
      <FunctionalAcknowledgement TransactionType="TransactionQuoteCapacita" Status="Rejected" XmlOrder="1">
        <RejectInformation>
          <Reason>QC05</Reason>
          <ReasonText>la quota alfa per la data 02/03/2009 deve essere comunicata entro 01/03/2009 12.00.00
(data corrente: 25/03/2009 10.47.17)</ReasonText>
        </RejectInformation>
      </FunctionalAcknowledgement>
    </TimmFA>
  </Transaction>
  <Transaction>
    <TimmFA>
      <FunctionalAcknowledgement TransactionType="TransactionQuoteCapacita" Status="Rejected" XmlOrder="2">
        <RejectInformation>
          <Reason>QC05</Reason>
          <ReasonText>la quota alfa per la data 04/03/2009 deve essere comunicata entro 03/03/2009 12.00.00
(data corrente: 25/03/2009 10.47.17)</ReasonText>
        </RejectInformation>
      </FunctionalAcknowledgement>
    </TimmFA>
  </Transaction>
</Message>


```

4.1.3 FunctionalAcknowledgement.xsd

```
<?xml version="1.0" encoding="iso-8859-1" ?>
<schema
  xmlns="http://www.w3.org/2001/XMLSchema"
  targetNamespace="urn:XML-TIMM"
  xmlns:pd="urn:XML-TIMM"
  elementFormDefault="qualified">
  <include schemaLocation="RegistrationTypes.xsd" />
  <include schemaLocation="BaseMessageTypes.xsd" />
  <include schemaLocation="Types.xsd" />
  <complexType name="tyFunctionalAcknowledgement">
    <sequence>
      <element ref="pd:RejectInformation" minOccurs="0" maxOccurs="unbounded"/>
    </sequence>
    <attribute name="TransactionType" type="pd:tyTransactionType" use="optional"/>
    <attribute name="Status" type="pd:tyTransactionStatus" use="required"/>
    <attribute name="MPN" type="string" use="optional"/>
    <attribute name="XmlOrder" type="int" use="required"/>
  </complexType>
</schema>
```

4.2 Notifica di errore (ref xsd: TimmBaseMessage.xsd)

```
<?xml version="1.0" encoding="iso-8859-1"?>
<Message xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
MessageDate="2009-03-25" MessageTime="10:44:25.1406250+01:00" ResponseReferenceMessageCode="809"
ResponseMessageStatus="Rejected" xmlns="urn:XML-TIMM">
  <Header>
    <Sender>
      <OperatorMsgCode>IDGME</OperatorMsgCode>
    </Sender>
    <Receiver>
      <OperatorMsgCode>IDAU</OperatorMsgCode>
    </Receiver>
  </Header>
  <Error Code="M01" Description="The 'Ora' attribute is invalid - The value '' is invalid according to its
datatype 'urn:XML-TIMM:tyHourIntervalType' - The string '' is not a valid Integer value." />
</Message>
```

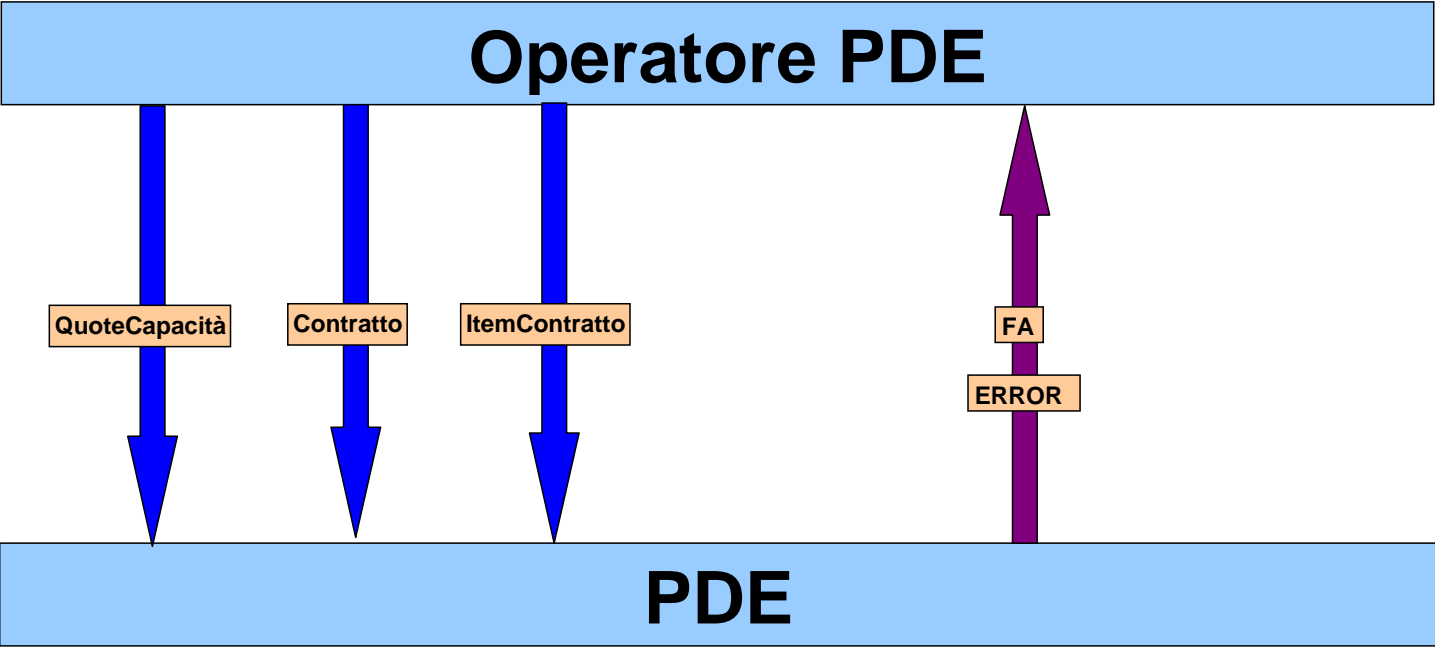

	Description	Possible Values
Element / Attribute Name	The name of the Element or Attribute used in the XML file	N/A
Attribute / Element	Whether a field is an Attribute or an Element within the XML document	A = Attribute E = Element
Valid Information in Field (enumeration)	Validation rules for element or attribute value, including list of possible values in enumeration	
Data Type	Describes the type of data expected in the field	A/N= <u>A</u> lpha <u>N</u> umeric (Field allows for alphabetic values, numeric values, as well as any combination of alphabetic and numeric values) N= Numeric (integers only) N/A= <u>N</u> ot <u>A</u> pplicable Enum= The only valid values are listed. Date= Date format used. Bool = boolean Decimal= Illustrates the position of the decimal point in reference to the overall length of the field.
Occurrences Min/Max	Describes the expected number of times that the attribute or element can occur within the XML document	n/x where n= the minimum number of occurrences allowed for the element or attribute and x = the maximum number of occurrences for the element or attribute; or a specification directly of the number of occurrences within another structure, such as "1 per PIPEDocument".
Field Length	The expected length of the field	either a number which represents the required number of characters, or max=nn, where nn is the maximum number of digits or characters allowed for the field N/A= <u>N</u> ot <u>A</u> pplicable
Definition	The explanation of the Element or Attribute	N/A

Contratto Implementation Guide for PDE						
Element / Attribute names	Attribute / Element	Valid Information in Field (enumeration)	Data Type	Occurrences Min/Max	Field Length	Definition
Message		N/A	N/A	1 for file	N/A	
xmlns:xsd	A		A/N	1/1		Associates the actual schema instance being used to the name space.
xmlns:xsi	A		A/N	1/1		Defines the schema instance being used.
Version	E	1.0.2.0	A/N		max=7	Identifies the version of the CeMessageSchema
Header	E	(see Header data structure)		1/1		Sender and recipient of the message
Transaction	E	(see Transaction data structure)		1 or more		Transaction Container
MessageCode	A		A/N	0/1	min=1. max=32	Message identifier
MessageType	A	Request	Enum	0/1		Message Type
MessageDate	A	Valid Date (YYYY-MM-DD)	Date	1/1		Date of the message
MessageTime	A	ValidTime (hh:mm:ss.ffffff+01:00)	Time	0/1		Time of the message
MessageSubject	A		Enum	0/1		identifies the type of the transaction inside the message
Header						
Sender	E	(see Sender data structure)		1/1		message sender
Receiver	E	(see Receiver data structure)		1/1		message receiver
Sender						
OperatorMsgCode	E		A/N	1/1	min=1 max=16	The unique identifier of the Sender
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Sender
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who sends
Receiver						
OperatorMsgCode	E	(IDGME)	A/N	1/1	min=1 max=16	The unique identifier of the Receiver
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Receiver
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who receives
Transaction						
Contratto	E	(see Contratto data structure)		1/1		
MPN	A		A/N	0/1	max=32	identifier for the transaction assigned by the Operator
Contratto						
ContrattoCommon	E	(see ContrattoCommon data structure)		1/1		
ContrattoCommon						
CodiceContratto	E		A/N	1/1	min=1 max=32	Contratto unique identifier
DataStipula	E	valid date (YYYYMMDD)	Date	1/1	decimal(8,0)	Contratto's date of conclusion
Cedente	E		A/N	1/1	min=1 max=150	Seller's ETSO code (only for electricity operators)/ VAT
RagioneSocialeCedente	E		A/N	0/1	max=256	Seller's name
Acquirente	E		A/N	1/1	min=1 max=150	Buyer's ETSO code (only for electricity operators)/ VAT
RagioneSocialeAcquirente	E		A/N	0/1	max=256	Buyer's name
ControparteElettrica	E	true,false	Bool	1/1	bool	type of counterparty
Tipologia	E	STD,OTCO,OTC	Enum	1/1		OTC (over the counter), STD (organized market), OTCO (organized over the counter)
MercatoOrganizzato	E		A/N	0/1	min=0 max=256	organized market's code
Struttura	E	future, swap, opzione,forward, altro	Enum	1/1		structure of the contract
Descrizione	E		A/N	0/1	min=0 max=512	description of the structure if the Struttura is "altro"
Indicizzato	E	true,false	Bool	1/1		indicates whether the contract is indexed in price
Indicizzazione	E		A/N	0/1	min=0 max=256	description of the indexing if the Indicizzato is true
Flessibile	E	true,false	Bool	1/1		indicates whether the contract is indexed both in price and quantity
DescrizioneFlessibile	E		A/N	0/1	min=0 max=256	description of "flessibile" if "flessibile" is true
Premio	E	999999999999.99	Decimal	0/1		Award of contract
PrezzoRiferimento	E	Pun, Pnord, Pmtfv, Pcnor, Pcsud, Psud, Plogn, Pbrn, Prosn, Psici, Pprgp, Psard, Pfran, Psviz, Paust, Pslov, Pcoac, Pcors, Pgreg, Altro	Enum	1/1		Reference price index
DescrizionePrezzoRiferimento	E					description of the reference price if the PrezzoRiferimento is "Altro"
Frequenza	E	integer	int	0/1	min=1 max=36	frequency of ex-post communications
ProfiloGiornaliero	E	(see ProfiloGiornaliero structure)		1 or more		
ProfiloGiornaliero						
ProfiloOrario	E	(see ProfiloOrario structure)		1 to 25		
Data	A	valid date (YYYYMMDD)	Date	1/1		Date
ProfiloOrario						
Ora	A	999999999999.99	Decimal		(18,3)	Quantity
Prezzo	A		N	1/1	min=1 max=25	Hour
	A	999999999999.99	Decimal	0/1	(18,2)	Price

ItemContratto Implementation Guide for PDE						
Element / Attribute names	Attribute / Element	Valid Information in Field (enumeration)	Data Type	Occurrences Min/Max	Field Length	Definition
Message		N/A	N/A	1 for file	N/A	
xmlns:xsd	A		A/N	1/1		Associates the actual schema instance being used to the name space.
xmlns:xsi	A		A/N	1/1		Defines the schema instance being used.
Version	E	1.0.2.0	A/N		max=7	Identifies the version of the CeMessageSchema
Header	E	(see Header data structure)		1/1		Sender and recipient of the message
Transaction	E	(see Transaction data structure)		1 or more		Transaction Container
MessageCode	A		A/N	0/1	min=1. max=32	Message identifier
MessageType	A	Request	Enum	0/1		Message Type
MessageDate	A	Valid Date (YYYY-MM-DD)	Date	1/1		Date of the message
MessageTime	A	ValidTime (hh:mm:ss.ffffff+01:00)	Time	0/1		Time of the message
MessageSubject	A		Enum	0/1		identifies the type of the transaction inside the message
Header						
Sender	E	(see Sender data structure)		1/1		message sender
Receiver	E	(see Receiver data structure)		1/1		message receiver
Sender						
OperatorMsgCode	E		A/N	1/1	min=1 max=16	The unique identifier of the Sender
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Sender
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who sends
Receiver						
OperatorMsgCode	E	(IDGME)	A/N	1/1	min=1 max=16	The unique identifier of the Receiver
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Receiver
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who receives
Transaction						
ItemContratto	E	(see ItemContratto data structure)		1/1		
MPN	A		A/N	0/1	max=32	identifier for the transaction assigned by the Operator
ItemContratto						
ContrattoCommon	E	(see ItemContrattoCommon data structure)		1/1		
ItemContrattoCommon						
CodiceContratto	E		A/N	1/1	min=1 max=32	Contratto unique identifier
ProfiloGiornaliero	E	(see ProfiloGiornaliero structure)		1 or more		
ProfiloGiornaliero						
ProfiloOrario	E	(see ProfiloOrario structure)		1 to 25		
Data	A	valid date (YYYYMMDD)	Date	1/1		Date
ProfiloOrario						
Quantita	E	999999999999.99	Decimal		(18,3)	Quantity
Ora	A		N	1/1	min=1 max=25	Hour
Prezzo	A	999999999999.99	Decimal	0/1	(18,2)	Price

QuoteCapacita Implementation Guide for PDE						
Element / Attribute names	Attribute / Element	Valid Information in Field (enumeration)	Data Type	Occurrences Min/Max	Field Length	Definition
Message		N/A	N/A	1 for file	N/A	
xmlns:xsd	A		A/N	1/1		Associates the actual schema instance being used to the name space.
xmlns:xsi	A		A/N	1/1		Defines the schema instance being used.
Version	E	1.0.2.0	A/N		max=7	Identifies the version of the CeMessageSchema
Header	E	(see Header data structure)		1/1		Sender and recipient of the message
Transaction	E	(see Transaction data structure)		1 or more		Transaction Container
MessageCode	A		A/N	0/1	min=1. max=32	Message identifier
MessageType	A	Request	Enum	0/1		Message Type
MessageDate	A	Valid Date (YYYY-MM-DD)	Date	1/1		Date of the message
MessageTime	A	ValidTime (hh:mm:ss.ffffff+01:00)	Time	0/1		Time of the message
MessageSubject	A		Enum	0/1		identifies the type of the transaction inside the message
Header						
Sender	E	(see Sender data structure)		1/1		message sender
Receiver	E	(see Receiver data structure)		1/1		message receiver
Sender						
OperatorMsgCode	E		A/N	1/1	min=1 max=16	The unique identifier of the Sender
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Sender
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who sends
Receiver						
OperatorMsgCode	E	(IDGME)	A/N	1/1	min=1 max=16	The unique identifier of the Receiver
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Receiver
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who receives
Transaction						
ItemContratto	E	(see ItemContratto data structure)		1/1		
MPN	A		A/N	0/1	max=32	identifier for the transaction assigned by the Operator
QuoteCapacita						
QuoteCapacitaCommon	E	(see QuoteCapacitaCommon data structure)		1/1		
QuoteCapacitaCommon						
CodiceUnita	E		A/N	1/1	min=1 max=16	Alphanumeric code identifying the Consumption or Production Unit
CodiceOperatore	E		A/N	1/1	min=1 max=16	Operator's ETSO code
QuoteCapacitaGiornaliera	E	(see QuoteCapacitaGiornaliera structure)		1 or more		
QuoteCapacitaGiornaliera						
QuoteCapacitaOraria	E	(see QuoteCapacitaOraria structure)		1 to 25		
Data	A	valid date (YYYYMMDD)	Date	1/1		Date
QuoteCapacitaOraria						
QuoteCapacitaDelegato	E	(see QuoteCapacitaDelegatostructure)		1 or more		
Ora	A	valid date (YYYYMMDD)	N	1/1		Date
QuoteCapacitaDelegato						
CodiceOperatoreDelegato	A		Decimal	1/1	(3,2)	Hour

FA Implementation Guide for PDE						
Element / Attribute names	Attribute / Element	Valid Information in Field (enumeration)	Data Type	Occurrences Min/Max	Field Length	Definition
Message		N/A	N/A	1 for file	N/A	
xmins.xsd	A		A/N	1/1		Associates the actual schema instance being used to the name space.
xmins.xsi	A		A/N	1/1		Defines the schema instance being used.
Header	E	(see Header data structure)		1/1		Sender and recipient of the message
Transaction	E	(see Transaction data structure)		1 or more		Transaction Container
Message Type	A	Response		0/1		Message Type
Message Date	A	Valid Date (YYYY-MM-DD)	Date	1/1		Date of the message
Message Time	A	ValidTime (hh:mm:ss.ffff+01:00)	Time	0/1		Time of the message
ResponseReferenceMessageCode	A					Indicates the ID of message that is being referred to
ResponseMessageStatus	A		Accepted/Rejected/PartiallyAccepted	1/1		In the FunctionalAcknowledgment transaction indicates: 1. If the document is accepted (Accept) which means that all the transactions in the document have passed validation, partially accepted (Partial) which means that at least one transaction has been rejected, or rejected (Reject) which means that all the transaction have been rejected. 2. That a single transaction has been accepted or rejected.
Header						
Sender	E	(see Sender data structure)		1/1		message sender
Receiver	E	(see Receiver data structure)		1/1		message receiver
Sender						
OperatorMsgCode	E	(IDGME)	A/N	1/1	min=1 max=16	The unique identifier of the Sender
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Sender
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who sends
Receiver						
OperatorMsgCode	E		A/N	1/1	min=1 max=16	The unique identifier of the Receiver
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Receiver
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who receives
Transaction				1 or more		
MPN	A		A/N	0/1	max=32	identifier for the transaction assigned by the Operator
TimmFA	E	(see TimmFA structure)		1/1		
TimmFA						
FunctionalAcknowledgement	E	(see FunctionalAcknowledgement structure)		1/1		Contains tags that define the positive or negative acknowledgement of receipt of the original transaction.
FunctionalAcknowledgement						
TransactionType	A	ENUM	A/N	0/1		Indicates the type of transaction that is being referred to.
Status	A	Accept or Reject	A/N	1/1		
XmlOrder	A		A/N	1/1	int	original order in message that is being referred to
RejectInformation	E	(see Reject Information data structure)	A/N	0 or more		
RejectInformation						
Reason	E	N/A	A/N	1/1	max=30	A short description of the rejection of the transaction
ReasonText	E	N/A	A/N	1/1	max=250	The text explanation for the rejection of the transaction

ERROR Implementation Guide for PDE						
Element / Attribute names	Attribute / Element	Valid Information in Field (enumeration)	Data Type	Occurrences Min/Max	Field Length	Definition
Message		N/A	N/A	1 for file	N/A	
xmns:xsd	A		A/N	1/1		Associates the actual schema instance being used to the name space.
xmns:xsi	A		A/N	1/1		Defines the schema instance being used.
Header	E	(see Header data structure)		1/1		Sender and recipient of the message
Transaction	E	(see Transaction data structure)		1 or more		Transaction Container
Message Type	A	Response		0/1		Message Type
Message Date	A	Valid Date (YYYY-MM-DD)	Date	1/1		Date of the message
Message Time	A	ValidTime (hh:mm:ss.ffff+01:00)	Time	0/1		Time of the message
ResponseReferenceMessageCode	A					Indicates the ID of message that is being referred to
ResponseMessageStatus	A		Rejected	1/1		
Header						
Sender	E	(see Sender data structure)		1/1		message sender
Receiver	E	(see Receiver data structure)		1/1		message receiver
Sender						
OperatorMsgCode	E	(IDGME)	A/N	1/1	min=1 max=16	The unique identifier of the Sender
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Sender
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who sends
Receiver						
OperatorMsgCode	E		A/N	1/1	min=1 max=16	The unique identifier of the Receiver
CompanyName	E		A/N	0/1	min=1 max=60	The Name of the Receiver
UserMsgCode	E		A/N	0/1	min=1 max=16	The unique identifier for the user who receives
Error				1 /1		
Code	A		A/N	0/1	max=30	A short description of the rejection of the message
Description	E	(see TimnFA structure)		1/1	max=250	The text explanation for the rejection of the message